



PB 0 618 Cat Iron Pumps Product Catalog



ENGINEERING YOUR SUCCESS.

The Parker Hannifin Gear Pump Division Assures:

- Consistent quality
- Technical innovation
- Premier customer service

Worldwide Sales and Service

Parker operates sales and service centers in major industrial areas worldwide. Call 1-800-C-PARKER for more information, or for a synopsis of the Gear Pump Division, contact a Parker representative.

The Gear Pump Division's ability to engineer specialty products for unique applications has kept us at the forefront of technology, and ensured our position as the industry leader. Our success has come from providing a quality product with excellent sales and service support.

We manufacture hydraulic components for a wide range of industries including:

- Construction
- Truck/Bus
- Material handling
- Forestry
- Agriculture
- Industrial
- Turf care



WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the "Offer of Sale".

© Copyright 2018, Parker Hannifin Corporation, All Rights Reserved.

Table of Contents

SERIES 600:

Description and Characteristics 3

 Features 4

 Construction (Exploded/Cross Section View) 5

 PGP/PGM 610 Ordering Code 6

 PGP/PGM 610 Dimensions 7

 PGP/PGM 620 Ordering Code 8

 PGP/PGM 620 Dimensions 9

 PGP/PGM 640 Ordering Code 10

 PGP/PGM 640 Dimensions 11

 Spline Shaft Options 12

 Key Shaft Options 13

 Mounting Flange Options 15

 Port Options 16

 Performance Data 17

 Fluid Recommendations 20

Pump/Motor Products

PGP/PGM 610


- ▶ *Continuous pressures to 275 bar / 4000 psi*
- ▶ *Displacements from 7 to 32 cc/rev (.43 to 1.95 cir)*
- ▶ *SAE B 13-tooth spline available*
- ▶ *Integral valve options*

PGP/PGM610



PGP/PGM 620

- ▶ *Continuous pressures to 275 bar / 4000 psi*
- ▶ *Displacements from 19 to 50 cc/rev (1.16 to 3.05 cir)*
- ▶ *Multiple sections and cross frames with common inlet*
- ▶ *Integral valve options*

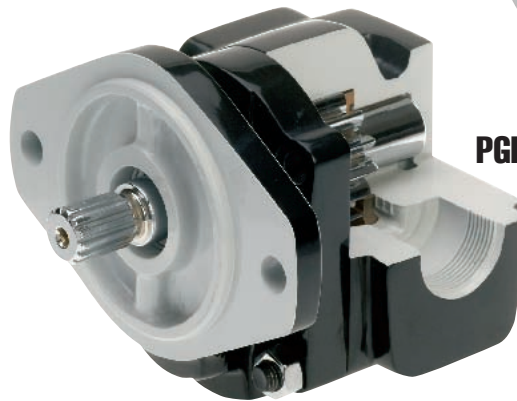

PGP/PGM620

PGP/PGM 640

- ▶ *Continuous pressures to 275 bar / 4000 psi*
- ▶ *Displacements from 30 to 80 cc/rev (1.83 to 4.88 cir)*
- ▶ *Multiple sections and cross frames with common inlet*
- ▶ *Integral valve options*



PGP/PGM640

Features of PGP/PGM600 Series


PGP/PGM 600

Parker Hydraulics has supplied gear pumps and motors to worldwide mobile and industrial markets for many years, especially for material handling, turf care, agricultural, and construction equipment applications. Many Parker pumps and motors have been developed and tested for the specific needs of these industries.

Parker's defined strategy to provide engineered solutions, coupled with an award-winning flexible manufacturing system has resulted in the availability of a wide range of special options.

Features of PGP/PGM 600

- Interlocking body design
- Multiple section and cross-frame pumps available
- Common inlets available for multiple section pumps
- Continuous operating pressures up to 275 bar (4000 psi)
- Pressure balanced thrust plate design for high efficiency

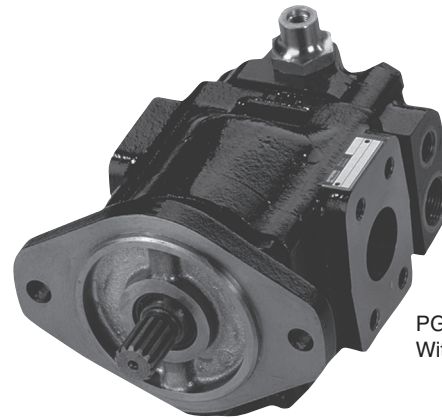

PGP620
With LS Priority



- Reduced system noise levels compared to earlier models and competitors' pumps
- High power through-drive capability
- Wide range of integral valves for power steering, power brakes, fan drives and implement hydraulics

Characteristics


Product Features	Description
Pump/motor type	Heavy-duty, cast iron, external gear.
Mounting	SAE, 2-bolt and 4-bolt
Ports	SAE split flange, straight thread o-ring
Shaft style	SAE splined, keyed, tapered.
Speed range	See tables, pages 17-19
Displacement	See codes pages 6,8,10
Rotation	Clockwise, counterclockwise or birotational.
Pump inlet pressure	1.0 bar (15 psig) Maximum 13 cm (5 in) Hg Maximum Vacuum at operating temperature
Inlet flow velocity	3.0 mps (10 fps) Max Pump
Outlet pressure	See pages 7, 9, 11
Axial / radial shaft loads	Call product support, call 1-888-700-7411
Hydraulic fluids	Petroleum oil (mineral base) Biodegradable oil Fire resistant fluids such as: - water-oil emulsions 60/40, HFB - water-glycol, HFC - phosphate-esters, HFD Note: Pressure ratings are reduced by 35 bar (500 psi) when using water-oil emulsions or water glycol, see pages 20-21 for details.
Fluid temperature	Range of operating temperature -15 to +80°C (5 to 176°F). Temperature for cold start -20 to -15°C (-4 to +5°F) at speed ≤ 1500 rpm. Maximum permissible operating pressure is dependent on fluid temperature.

Product Features	Description
Recommended fluid viscosity (petroleum oil)	Range of operating viscosity 15 to 75 cSt. Max. operating viscosity should not exceed 1600 cSt. Recommended min. viscosity 8 cSt. See pages 20-21 for more details.
Recommended filtration	According to ISO 4406 code. 20/18/15 at 140 bar (2000psi) 19/17/14 at 210 bar (3000psi) 17/15/12 at 275 bar (4000psi)
Multiple pump assemblies	- Available in two or three section configurations. - Max. shaft loading must conform to the limitations shown in the Shaft Load Capacity table, see page 14 . - The max. load is determined by adding the torque values for each pumping section that will be simultaneously loaded.
Separate or common inlet capability	Separate Inlet configuration: - Each gear housing has individual inlet and outlet ports. Common Inlet configuration: - Two or more gear sets share a common inlet.
Valve options	-Load sensing priority -Constant primary flow priority -Relief valves -Anti-cav checks (motor)

PGP/PGM 600 Series Construction

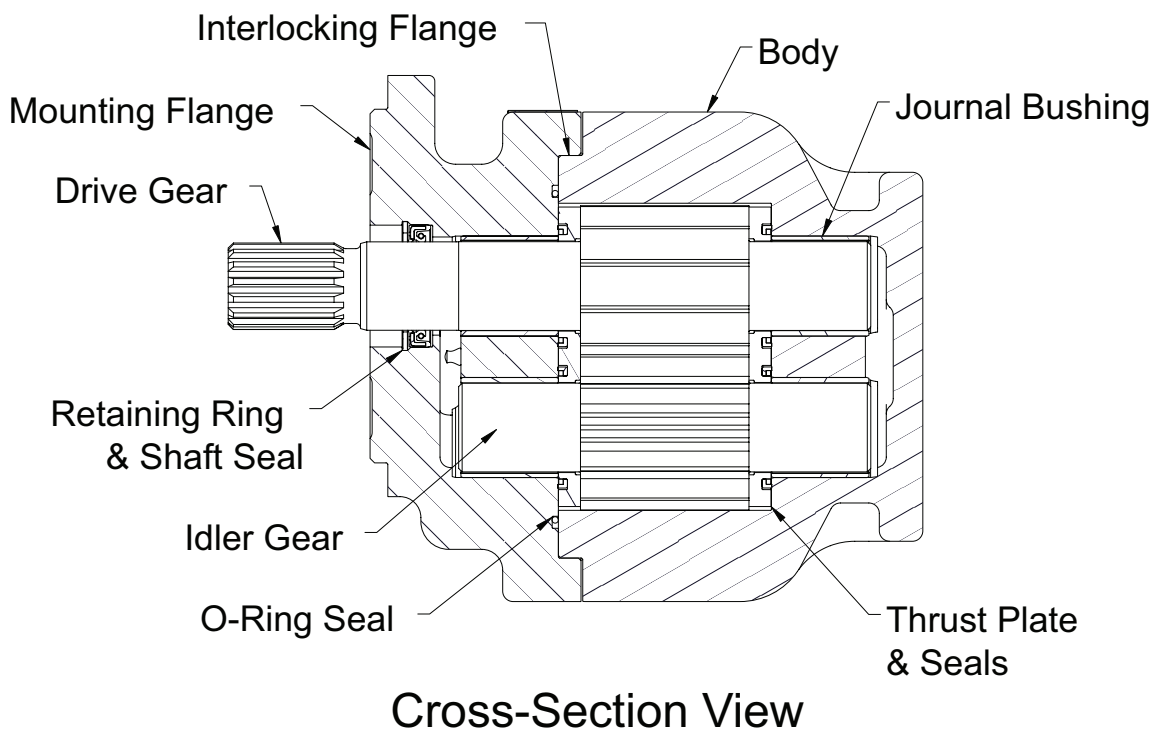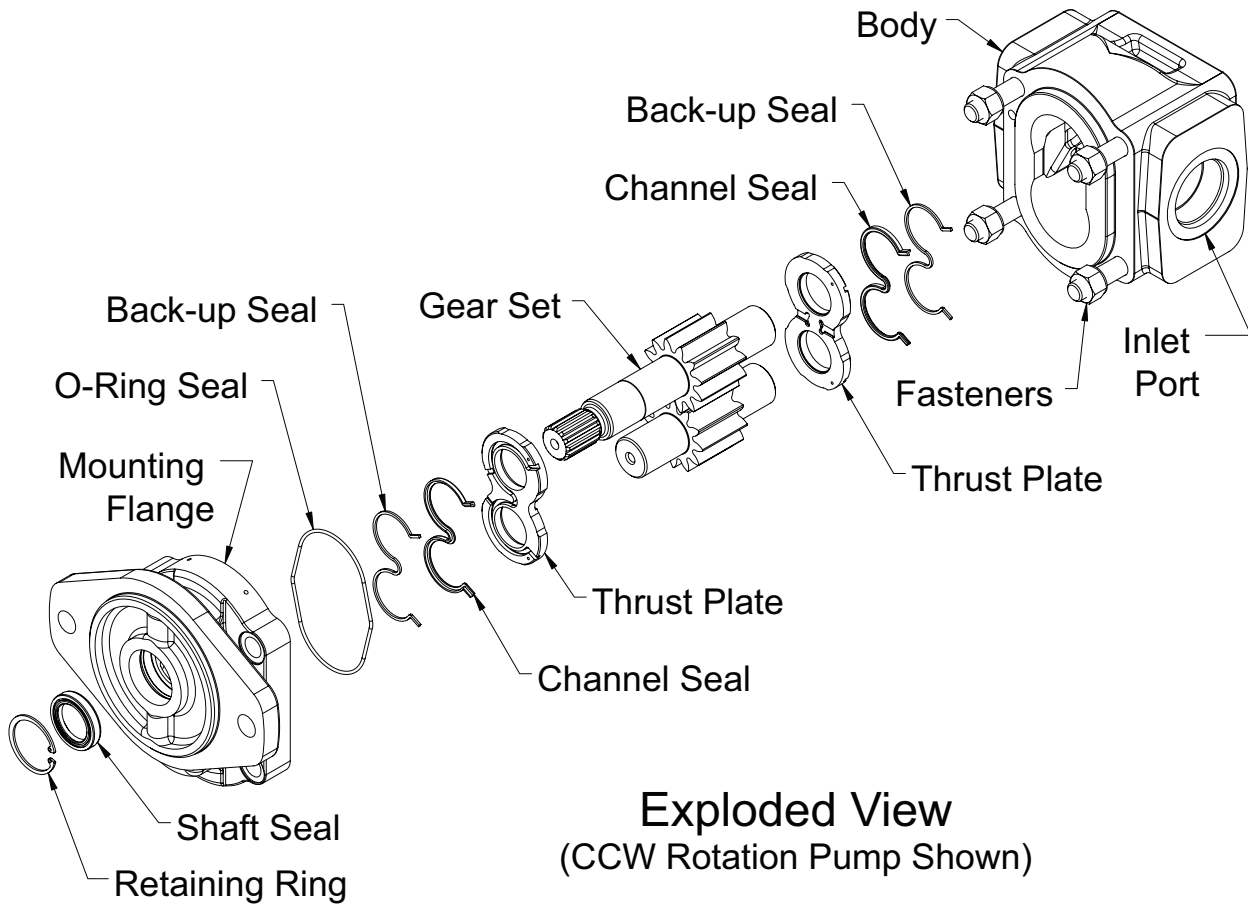

PGP/PGM 610 How to Specify

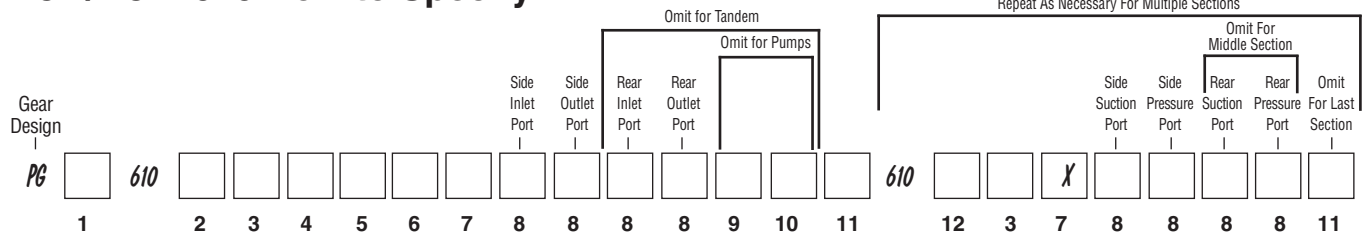

1 Pump/Motor	
P	Pump
M	Motor

2 Unit		
	Pump	Motor
A	Single unit	Standard Motor w/o checks
B	Multiple unit	Standard Motor w/ two checks
C	—	Standard Motor w/one anti cavitation check (ACC)

3 Displacement	
0070	7 cc/rev (0.43 in ³ /rev)
0100	10 cc/rev (0.61 in ³ /rev)
0140	14 cc/rev (0.85 in ³ /rev)
0160	16 cc/rev (0.98 in ³ /rev)
0180	18 cc/rev (1.10 in ³ /rev)
0210	21 cc/rev (1.28 in ³ /rev)
0230	23 cc/rev (1.40 in ³ /rev)
0260	26 cc/rev (1.59 in ³ /rev)
0280	28 cc/rev (1.71 in ³ /rev)
0320	32 cc/rev (1.95 in ³ /rev)

4 Rotation	
C	Clockwise
A	Counter clockwise
B	Bi-directional (Motor Only)

5 Shaft*	
A1	9T, SAE "A" spline
C1	11T, SAE 19-4 spline
D1	13T, SAE "B" spline
K1	32L, SAE "A" parrallel
L6	32L, SAE "19-1" parrallel

*See Note 1

6 Flange	
H2	SAE "A" 2-bolt
H3	SAE "B" 2-bolt

7 Shaft Seal*	
X	No seal
N	NBR (Buna-N) (pump only)
V	FPM, FKM (Fluorocarbon) (pump only)
M	Double NBR (Buna-N) (pump only)
W	Double FPM (Fluorocarbon) (pump only)
H	High Pres.(7bar) (motor only)

*See Note 2

9 Motor Drain Option	
B1	No drain
A	SAE-4, straight thread o-ring
C	SAE-6, straight thread o-ring

10 Motor Drain Position	
4	Rear drain

11 Inlet Options (Multi Section Units Only)	
C	Common
S	Separate

12 Multiple Unit	
A	Last section
B	Middle section

8 Port Options*			
Code	Description	Rear Ports	Available Displacements for Side Ports
B1	No ports	n/a	7 thru 32 cc
D3	SAE-8 straight thread o-ring	Yes	7 thru 32 cc
D4	SAE-10 straight thread o-ring	Yes	7 thru 32 cc
D5	SAE-12 straight thread o-ring	Yes	7 thru 32 cc
D6	SAE-16 straight thread o-ring	No	7 thru 32 cc
D7	SAE-20 straight thread o-ring	No	14 thru 32 cc
S1	½" Split Flange, SAE Code 61	No	7 thru 32 cc
S2	¾" Split Flange, SAE Code 61	No	7 thru 32 cc
S3	1" Split Flange, SAE Code 61	No	14 thru 32 cc
S4	1¼" Split Flange, SAE Code 61	No	14 thru 32 cc


*See Note 3

Notes:

1. See shaft load capacity table, [page 14](#), to check shaft strength.
2. Specify "V" or "W" code if phosphate ester fluid is used or if operating temperatures exceed 80°C (176°F).
3. See [page 16](#) for recommended maximum flows.


PGP/PGM 610 Specification - Standard Displacements - Single Unit

Pump Displacement	Code	0070	0100	0140	0160	0180	0210	0230	0260	0280	0320
	cc/rev	7.0	10.0	14.0	16.0	18.0	21.0	23.0	26.0	28.0	32.0
	in ³ /rev	0.43	0.61	0.85	0.98	1.10	1.28	1.40	1.59	1.71	1.95
Continuous Pressure	bar	275	275	275	275	265	245	235	215	200	175
	psi	3989	3989	3989	3989	3843	3553	3408	3118	2901	2538
Intermittent Pressure	bar	300	300	300	300	290	270	260	240	220	175
	psi	4351	4351	4351	4351	4206	3916	3771	3480	3190	2538
Port Location "X"	mm	71.0	75.5	75.0	78.0	81.0	81.5	83.5	81.0	84.0	90.5
	inch	2.80	2.97	2.95	3.07	3.19	3.21	3.29	3.19	3.31	3.56
Overall Length "Y"	mm	99.0	103.5	109.5	112.5	115.5	120.0	122.0	123.5	126.5	135.0
	inch	3.90	4.07	4.31	4.43	4.55	4.72	4.80	4.86	4.98	5.31
Weight*	kg	5.9	6.2	6.5	6.8	6.8	7.1	7.2	7.3	7.5	8.0
	lb	13.1	13.6	14.4	14.9	15.0	15.6	15.9	16.2	16.5	17.6

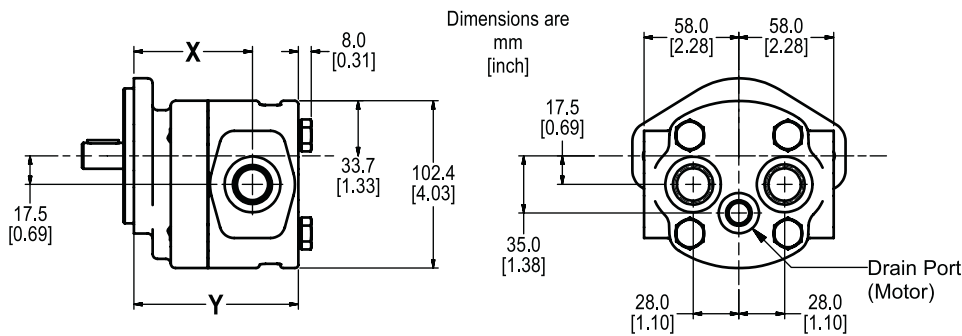


PGP/PGM 610 Specification - Standard Displacements - Tandem Unit

Pump Displacement	Code	0070	0100	0140	0160	0180	0210	0230	0260	0280	0320
	cc/rev	7.0	10.0	14.0	16.0	18.0	21.0	23.0	26.0	28.0	32.0
	in ³ /rev	0.43	0.61	0.85	0.98	1.10	1.28	1.40	1.59	1.71	1.95
Front Port Location "X1"	mm	71.0	75.5	75.0	78.0	81.0	81.5	83.5	81.0	84.0	90.5
	inch	2.80	2.97	2.95	3.07	3.19	3.21	3.29	3.19	3.31	3.56
Front Overall Length "Y1"	mm	96.0	100.5	106.5	109.5	112.5	117.0	119.0	120.5	123.5	132.5
	inch	3.78	3.96	4.19	4.31	4.43	4.61	4.69	4.74	4.86	5.22
Rear Port Location "X2"	mm	25.0	25.0	31.5	31.5	31.5	35.5	35.5	39.5	39.5	42.0
	inch	0.98	0.98	1.24	1.24	1.24	1.40	1.40	1.56	1.56	1.65
Rear Overall Length "Y2"	mm	95.5	100.0	106.0	109.0	112.0	116.5	118.5	120.0	123.0	132.0
	inch	3.76	3.94	4.17	4.29	4.41	4.59	4.67	4.72	4.84	5.20
Weight - Front Section*	kg	5.6	5.9	6.2	6.4	6.5	6.8	6.9	7.0	7.2	7.7
	lb	12.4	12.9	13.7	14.2	14.3	14.9	15.2	15.5	15.8	17.0
Weight - Rear Section*	kg	5.7	5.9	6.3	6.5	6.5	6.8	7.0	7.1	7.2	7.8
	lb	12.5	13.0	13.8	14.3	14.4	15.0	15.3	15.6	15.9	17.2

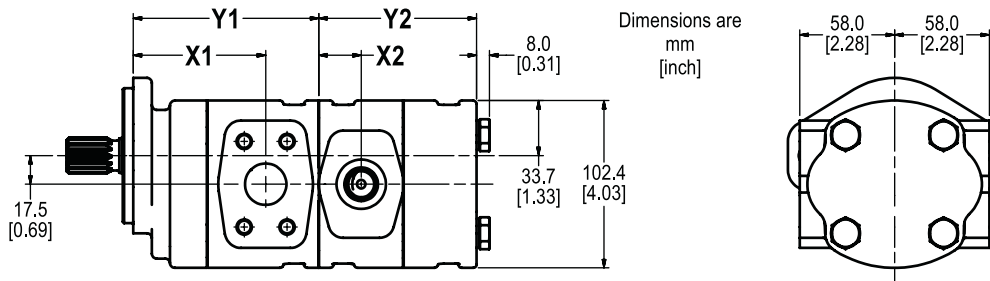

*All weights are approximate. The actual weight of an assembly will depend upon the porting and the type of shaft and mounting specified. The weight of a tandem pump will be the sum of the weights of each section.

PGP/PGM 620 How to Specify

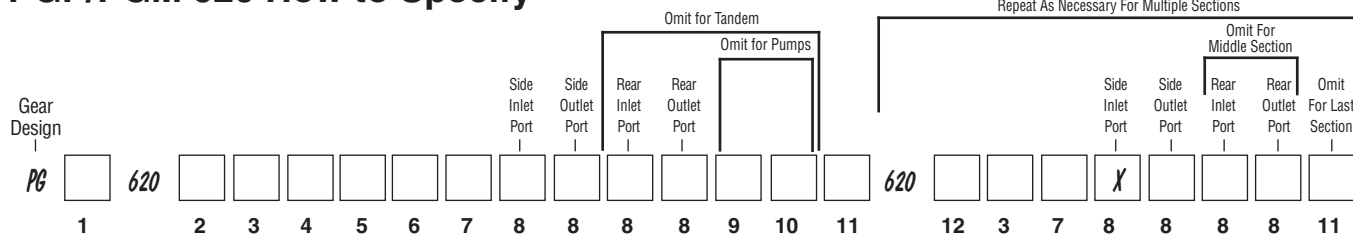

1 Pump/Motor	
P	Pump
M	Motor

2 Unit		
	Pump	Motor
A	Single unit	Standard Motor w/o checks
B	Multiple unit	Standard Motor w/ two checks
C	—	Standard Motor w/one anti cavitation check (ACC)

3 Displacement	
0190	19 cc/rev (1.16 in ³ /rev)
0230	23 cc/rev (1.40 in ³ /rev)
0260	26 cc/rev (1.59 in ³ /rev)
0290	29 cc/rev (1.77 in ³ /rev)
0330	33 cc/rev (2.01 in ³ /rev)
0370	37 cc/rev (2.26 in ³ /rev)
0410	41 cc/rev (2.50 in ³ /rev)
0440	44 cc/rev (2.69 in ³ /rev)
0500	50 cc/rev (3.05 in ³ /rev)

4 Rotation	
C	Clockwise
A	Counter clockwise
B	Bi-directional (Motor Only)

5 Shaft	
C1	SAE 19-4 spline, 11T
D1	SAE "B" spline, 13T
E1	SAE "B-B" spline, 15T
M1	SAE "B" parallel key
M2	SAE "B-B", parallel key
L6	SAE 19-1 parallel key
R3	SAE "B" taper 8:1

*See Note 1

6 Flange	
A3	SAE "B" 4-bolt square
A4	SAE "C" 4-bolt square
H2	SAE "A" 2-bolt
H3	SAE "B" 2-bolt

7 Shaft Seal	
X	No seal
N	NBR (Buna-N) (pump only)
V	FPM, FKM (Fluorocarbon) (pump only)
M	Double NBR (Buna-N) (pump only)
W	Double FPM (Fluorocarbon) (pump only)
H	High Pres.(5bar) (motor only)

*See Note 2

9 Motor Drain Option	
B1	No drain
C	SAE-6, straight thread o-ring

10 Motor Drain Position	
4	Rear drain

11 Inlet Options (Multi Section Units Only)	
C	Common
S	Separate

12 Multiple Unit	
A	Last section
B	Middle section

8 Port Options*			
Code	Description	Rear Ports	Available Displacements for Side Ports
B1	No ports	n/a	19 thru 50 cc
D3	SAE-8 straight thread o-ring	Yes	19 thru 50 cc
D4	SAE-10 straight thread o-ring	Yes	19 thru 50 cc
D5	SAE-12 straight thread o-ring	Yes	19 thru 50 cc
D6	SAE-16 straight thread o-ring	Yes	19 thru 50 cc
D7	SAE-20 straight thread o-ring	No	19 thru 50 cc
D8	SAE-24 straight thread o-ring	No	29 thru 50 cc
S1	½" Split Flange, SAE Code 61	No	19 thru 50 cc
S2	¾" Split Flange, SAE Code 61	No	19 thru 50 cc
S3	1" Split Flange, SAE Code 61	No	19 thru 50 cc
S4	1¼" Split Flange, SAE Code 61	No	19 thru 50 cc
S5	1½" Split Flange, SAE Code 61	No	29 thru 50 cc
S6	2" Split Flange, SAE Code 61	No	29 thru 50 cc


*See Note 3

Notes:

- See shaft load capacity table, [page 14](#), to check shaft strength.
- Specify "V" or "W" code if phosphate ester fluid is used or if operating temperatures exceed 80°C (176°F).
- See [page 16](#) for recommended maximum flows.


PGP/PGM 620 Specification - Standard Displacements - Single Unit

Pump Displacement	Code	0190	0230	0260	0290	0330	0370	0410	0440	0500
	cc/rev	19.0	23.0	26.0	29.0	33.0	37.0	41.0	44.0	50.0
	in ³ /rev	1.16	1.40	1.59	1.77	2.01	2.26	2.50	2.68	3.05
Continuous Pressure	bar	275	275	275	275	275	250	220	210	210
	psi	3989	3989	3989	3989	3989	3626	3191	3046	3046
Intermittent Pressure	bar	300	300	300	300	300	275	245	230	210
	psi	4351	4351	4351	4351	4351	3989	3553	3336	3046
Port Location "X"	mm	82.5	86.9	90.2	93.5	97.9	102.3	106.7	110.0	116.6
	inch	3.25	3.42	3.55	3.68	3.85	4.03	4.20	4.33	4.59
Overall Length "Y"	mm	123.5	127.9	131.2	134.5	138.9	143.3	147.7	151.0	157.6
	inch	4.86	5.04	5.17	5.30	5.47	5.64	5.81	5.94	6.20
*Weight	kg	12.1	12.2	12.3	12.6	12.7	12.9	13.0	13.1	13.3
	lb	26.7	26.9	27.1	27.8	28.0	28.4	28.7	28.9	29.3

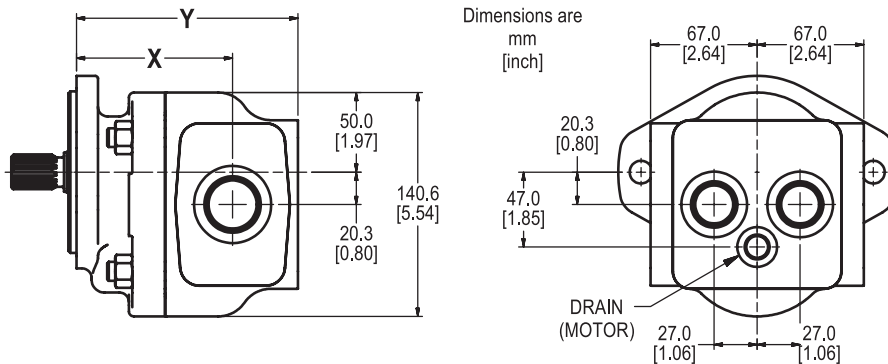


PGP/PGM 620 Specification - Standard Displacements - Tandem Unit

Pump Displacement	Code	0190	0230	0260	0290	0330	0370	0410	0440	0500
	cc/rev	19.0	23.0	26.0	29.0	33.0	37.0	41.0	44.0	50.0
	in ³ /rev	1.16	1.40	1.59	1.77	2.01	2.26	2.50	2.68	3.05
Front Port Location "X"	mm	82.5	86.9	90.2	93.5	97.9	102.3	106.7	110.0	116.6
	inch	3.25	3.42	3.55	3.68	3.85	4.03	4.20	4.33	4.59
Front Overall Length "Y"	mm	123.5	127.9	131.2	134.5	138.9	143.3	147.7	151.0	157.6
	inch	4.86	5.04	5.17	5.30	5.47	5.64	5.81	5.94	6.20
Rear Overall Length "Y"	mm	123.5	127.9	131.2	134.5	138.9	143.3	147.7	146.0	157.6
	inch	4.86	5.04	5.17	5.30	5.47	5.64	5.81	5.75	6.20
*Weight Front Section	kg	12.1	12.2	12.3	12.6	12.7	12.9	13.0	13.1	13.3
	lb	26.7	26.9	27.1	27.8	28.0	28.4	28.7	28.9	29.3
*Weight Rear Section	kg	12.1	12.2	12.3	12.6	12.7	12.9	13.0	11.5	13.3
	lb	26.7	26.9	27.1	27.8	28.0	28.4	28.7	25.4	29.3

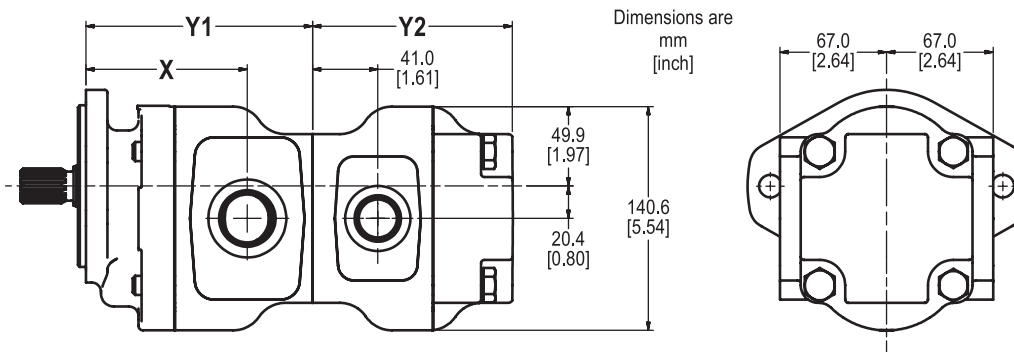

*All weights are approximate. The actual weight of an assembly will depend upon the porting and the type of shaft and mounting specified. The weight of a tandem pump will be the sum of the weights of each section.

PGP/PGM 640 How to Specify

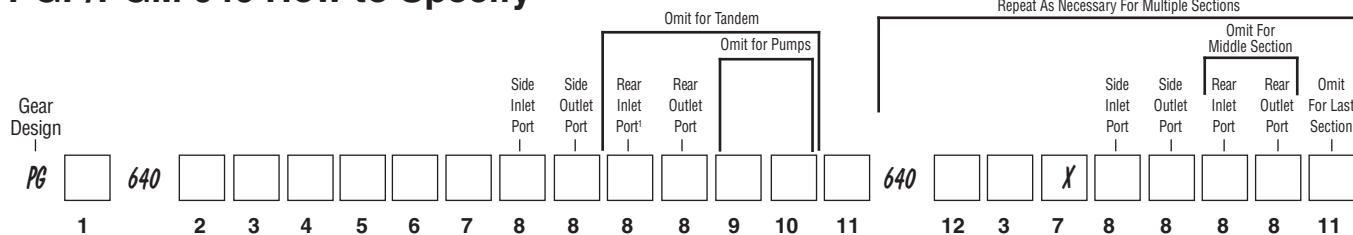

1 Pump/Motor	
P	Pump
M	Motor

2 Unit		
	Pump	Motor
A	Single unit	Standard Motor w/o checks
B	Multiple unit	Standard Motor w/ two checks
C	—	Standard Motor w/one anti cavitation check (ACC)

3 Displacement	
0300	30 cc/rev (1.83 in ³ /rev)
0350	37 cc/rev (2.14 in ³ /rev)
0450	45 cc/rev (2.75 in ³ /rev)
0550	55 cc/rev (3.36 in ³ /rev)
0650	65 cc/rev (4.00 in ³ /rev)
0750	75 cc/rev (4.58 in ³ /rev)
0800	80 cc/rev (4.88 in ³ /rev)

4 Rotation	
C	Clockwise
A	Counter clockwise
B	Bi-directional (Motor Only)

5 Shaft	
D1	SAE "B" spline, 13T
E1	SAE "B-B" spline, 15T
E4	SAE "C" spline, 14T
M2	SAE "B-B" parallel key
N1	SAE "C" parallel key

*See Note 1

6 Flange	
A3	SAE "B" 4-bolt square
A4	SAE "C" 4-bolt square
H3	SAE "B" 2-bolt flange
K3	SAE "C" 2-bolt flange

7 Shaft Seal	
X	No seal
N	NBR (Buna-N) (pump only)
V	FPM, FKM (Fluorocarbon) (pump only)
M	Double NBR (Buna-N) (pump only)
W	Double FPM (Fluorocarbon) (pump only)
H	High Pres. (5bar) (motor only)

*See Note 2

9 Motor Drain Option	
B1	No drain
C	SAE-6, Straight thread o-ring

10 Motor Drain Position	
4	Rear drain

11 Inlet Options (Multi Section Units Only)	
C	Common inlet (passage)
S	Separate

12 Multiple Unit	
A	Last section
B	Middle section

8 Port Options*			
Code	Description	Rear Ports	Available Displacements for Side Ports
B1	No ports	n/a	30 thru 80 cc
D5	SAE-12 straight thread o-ring	Yes	30 thru 80 cc
D6	SAE-16 straight thread o-ring	Yes	30 thru 80 cc
D7	SAE-20 straight thread o-ring	Yes	30 thru 80 cc
D8	SAE-24 straight thread o-ring	Yes	30 thru 80 cc
D9	SAE-32 straight thread o-ring	No	30 thru 80 cc
S2	¾" Split Flange, SAE Code 61	No	30 thru 80 cc
S3	1" Split Flange, SAE Code 61	No	30 thru 80 cc
S4	1¼" Split Flange, SAE Code 61	No	30 thru 80 cc
S5	1½" Split Flange, SAE Code 61	No	30 thru 80 cc
S6	2" Split Flange, SAE Code 61	No	40 thru 80 cc


*See Note 3

Notes:

- See shaft load capacity table, [page 14](#), to check shaft strength.
- Specify "V" or "W" code if phosphate ester fluid is used or if operating temperatures exceed 80°C (176°F).
- See [page 16](#) for recommended maximum flows.


PGP/PGM 640 Specification - Standard Displacements - Single Unit

Pump Displacement	Code	0300	0350	0450	0550	0650	0750	0800
	cc/rev	30.0	35.0	45.0	55.0	65.0	75.0	80.0
	in ³ /rev	1.83	2.14	2.75	3.36	3.97	4.58	4.88
Continuous Pressure	bar	275	275	275	275	275	235	215
	psi	3989	3989	3989	3989	3843	3408	3118
Intermittent Pressure	bar	300	300	300	300	300	260	240
	psi	4351	4351	4351	4351	4206	3771	3481
Port Location "X"	mm	128.6	128.6	131.8	135.6	138.4	142.2	142.2
	inch	5.07	5.07	5.19	5.34	5.45	5.60	5.60
Overall Length "Y"	mm	176	176	183	189	196	203	203
	inch	6.90	6.93	7.19	7.45	7.71	7.99	7.99
*Weight	kg	20.6	20.6	21.2	22.0	22.6	23.3	24.0
	lb	42.2	45.4	46.7	48.5	49.8	51.4	53.0

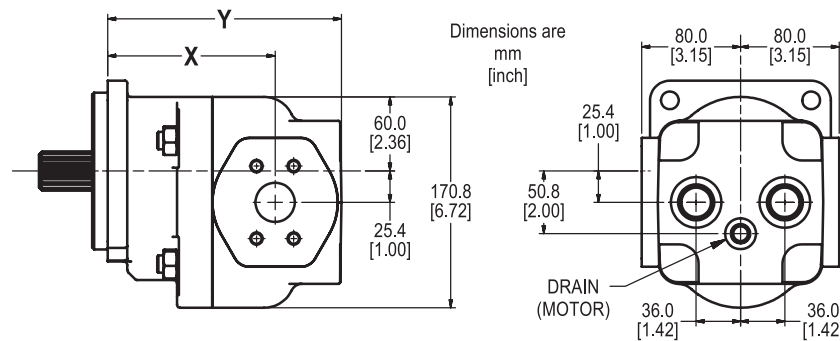

PGP/PGM 640 Specification - Standard Displacements - Tandem Unit

Pump Displacement	Code	0300	0350	0450	0550	0650	0750	0800
	cc/rev	30.0	35.0	45.0	55.0	65.0	75.0	80.0
	in ³ /rev	1.83	2.14	2.75	3.36	3.97	4.58	4.88
Front Port Location "X1"	mm	128.6	128.6	131.8	135.6	138.4	142.2	142.2
	inch	5.06	5.06	5.19	5.34	5.45	5.60	5.60
Rear Port Location "X2"	mm	44.5	44.5	47.9	50.7	54.5	58.0	58.0
	inch	1.75	1.75	1.89	2.00	2.15	2.28	2.28
Front Overall Length "Y"	mm	173.1	173.1	179.7	186.3	192.9	200.2	200.2
	inch	6.81	6.81	7.07	7.33	7.59	7.88	7.88
Rear Overall Length "Y"	mm	150.9	150.9	157.5	164.1	170.7	178.0	178.0
	inch	5.94	5.94	6.20	6.46	6.72	7.01	7.01
*Weight Front Section	kg	20.3	20.3	20.9	21.7	22.3	23.0	23.0
	lb	44.8	44.8	46.1	47.8	49.2	50.7	50.7
*Weight Rear Section	kg	19.3	19.3	19.9	20.7	21.3	22.0	22.0
	lb	42.5	42.5	43.9	45.6	47.0	48.5	48.5

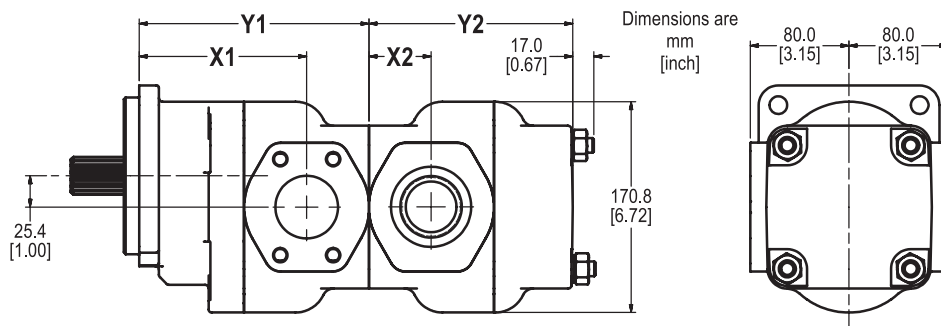


*All weights are approximate. The actual weight of an assembly will depend upon the porting and the type of shaft and mounting specified. The weight of a tandem pump will be the sum of the weights of each section.

PGP/PGM 600 Spline Shaft

Dimensions are shown as $\frac{\text{mm}}{[\text{in}]}$


Code A1 (610 only)

9T, 16/32 PITCH, 32L S.A.E. "A" SPLINE
FLAT ROOT SIDE FIT




Code E1 (620 & 640 only)

15T, 16/32 PITCH, 46L S.A.E. "B-B" SPLINE
FLAT ROOT SIDE FIT




Code C1 (610 & 620 only)

11T, 16/32 PITCH, 38.1L S.A.E. "19-4" SPLINE
FLAT ROOT SIDE FIT

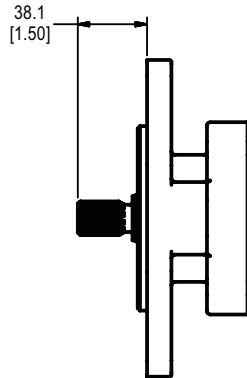


Code E4 (640 only)

14T, 12/24 PITCH, 55.6L S.A.E. "C" SPLINE
FLAT ROOT SIDE FIT




Code D1 (610, 620 & 640)

13T, 16/32 PITCH, 41.2L S.A.E. "B" SPLINE
FLAT ROOT SIDE FIT




PGP/PGM 600 Drive Shaft


Code K1 (610 only)
 Ø15.88, 4.0 KEY,
 NO THREAD, 32L
 S.A.E. "A" PARALLEL

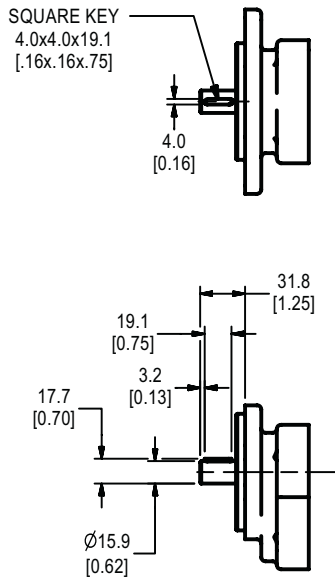


Code M1
(620 only)
 Ø22.22, 6.3 KEY,
 NO THREAD, 41.2L
 S.A.E. "B" PARALLEL

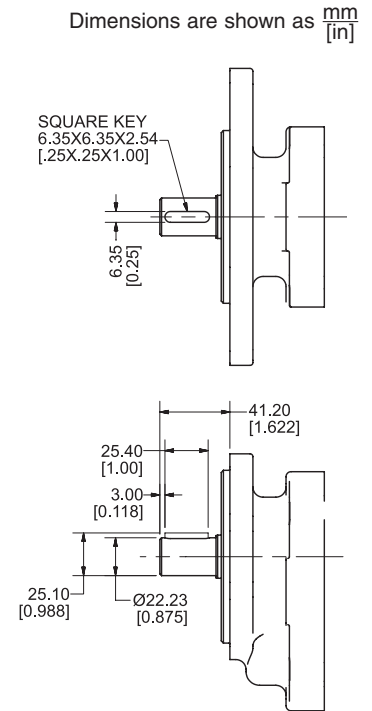

Code L6
(610 & 620 only)
 Ø19.05, 4.8 KEY,
 NO THREAD, 32L
 S.A.E. "19-1" PARALLEL

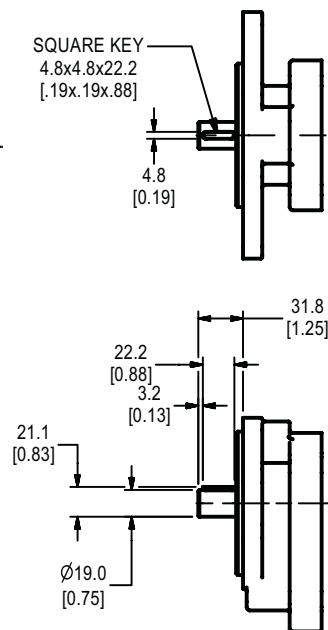


Code M2
(620 & 640 only)
 Ø25.4, 6.3 KEY,
 NO THREAD, 46L
 S.A.E. "B-B" PARALLEL

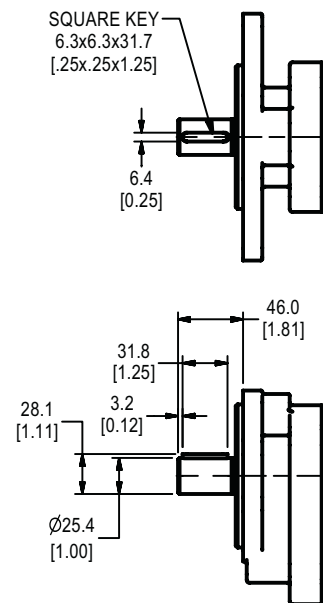


PGP/PGM 600 Drive Shaft

Dimensions are shown as $\frac{mm}{[in]}$

**Code N1
 (640 only)**
 Ø31.7, 8.0 KEY,
 NO THREAD, 55.6L
 S.A.E. "C" PARALLEL

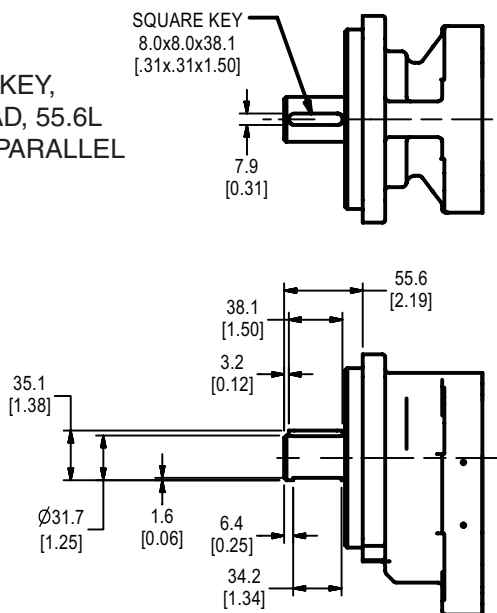

Code R3 (620 only)
 SAE "B" TAPER w/Key

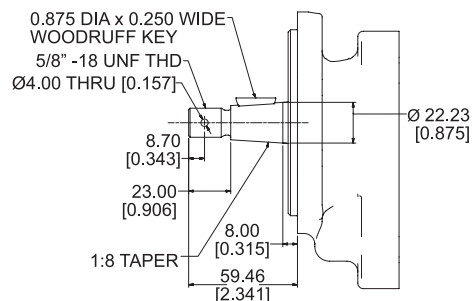

PGP/PGM 600- Shaft Load Capacity - Continuous Rating

Code	Type	Shaft Description	Maximum Allowable Torque					
			PGP610		PGP620		PGP640	
			Nm	lb-ft	Nm	lb-ft	Nm	lb-ft
A1	spline	SAE A, 9 tooth, 16/32 pitch	85	62	N/A	N/A	N/A	N/A
C1	spline	SAE 19-4, 11 tooth, 16/32 pitch	125	92	125	92	N/A	N/A
D1	spline	SAE B, 13 tooth, 16/32 pitch	245	181	245	181	350	258
E1	spline	SAE B-B, 15 tooth, 16/32 pitch	N/A	N/A	390	288	535	395
E4	spline	SAE C, 14 tooth, 12/24 pitch	N/A	N/A	N/A	N/A	1040	767
n/a	spline	Connecting Shaft-Tandem Units	130	96	225	166	435	321
K1	key	SAE A, 0.625" dia, 0.156" key	85	63	N/A	N/A	N/A	N/A
L6	key	SAE 19-1, 0.750" dia, 0.188" key	170	125	170	125	N/A	N/A
M1	key	SAE B, 0.875" dia, 0.250" key	200	148	200	148	N/A	N/A
M2	key	SAE BB, 1.000" dia, 0.250" key	N/A	N/A	320	236	320	236
N1	key	SAE C, 1.250" dia, 0.312" key	N/A	N/A	N/A	N/A	630	465
R3	taper	SAE B, 1:8 taper, 5/8" - 18 thd	N/A	N/A	190	140	N/A	N/A

To calculate the theoretical torque of a pump or motor:

$$\text{Torque (Nm)} = \frac{\text{Pressure (bar)} \times \text{Displacement (cc/rev)}}{62.8}$$

$$\text{Torque (lb-ft)} = \frac{\text{Pressure (psi)} \times \text{Displacement (cuin/rev)}}{75.4}$$

Approximate actual torque to drive a pump = 1.1 x theoretical torque.


Approximate actual torque from a motor = .9 x theoretical torque.

The total shaft torque for a multiple section unit will be the sum of the values for each section.
 Each connecting shaft should also be checked for torque load capacity.


PGP/PGM 600 Mounting Flange

Dimensions are shown as $\frac{\text{mm}}{\text{in}}$


Code H2 (610 & 620 only)
 S.A.E. "A" 2-BOLT

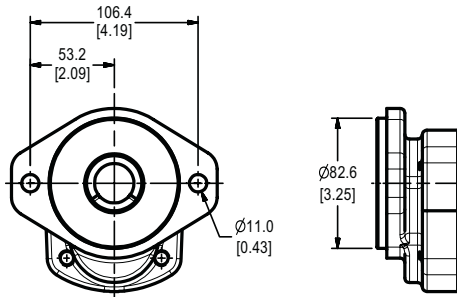


Code A3 (620 & 640 only)
 S.A.E. "B" 4-BOLT

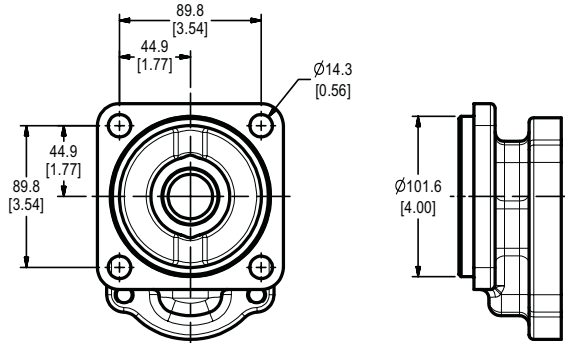


Code H3 (610, 620 & 640)
 S.A.E. "B" 2-BOLT

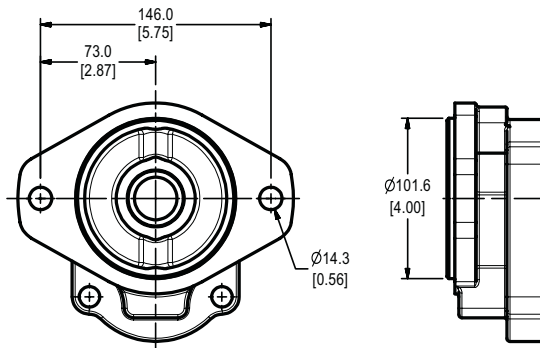

Code A4 (620 & 640 only)
 S.A.E. "C" 4-BOLT

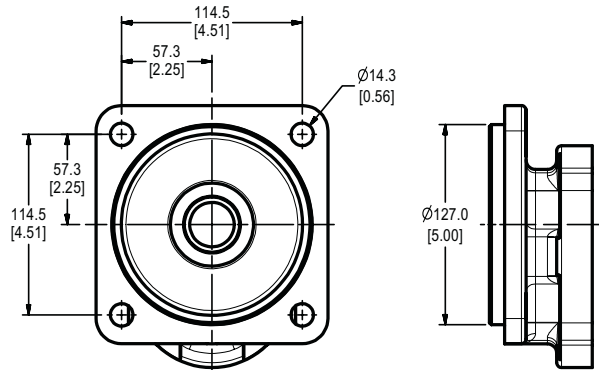

Code K3 (640 only)
 S.A.E. "C" 2-BOLT

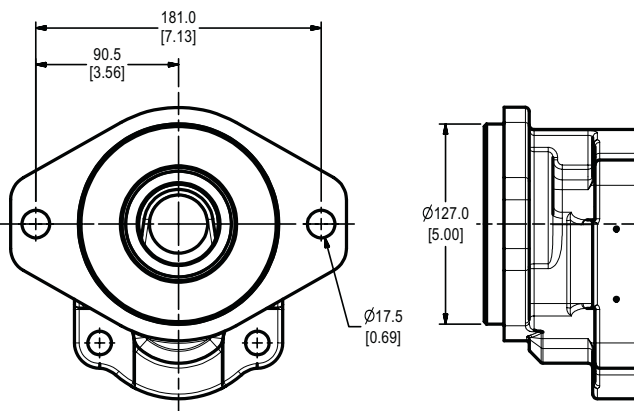


PGP/PGM 600 Porting

Dimensions are shown as $\frac{mm}{[in]}$

Porting Code D

SAE J1926 STRAIGHT THREAD O-RING

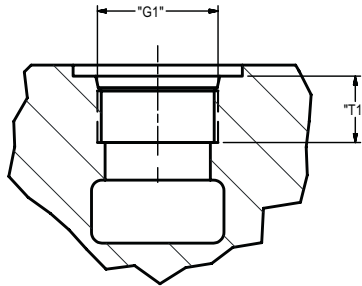


*Note: The pump inlet flow velocity should not exceed 3.0 m/s (10 fps). Pump outlet and motor inlet or outlet flow velocities should not exceed 6.1 m/s (20 fps).

Code	Dash Size	Nominal Tube OD	"G1" Thd Size inch	"T1" Full Thd Min mm (inch)	Recommended Max Flow* lpm (gpm)	
					Pump Inlet	Pump Outlet & Motor
D3	-8	1/2"	3/4"-16	14.3 (.56)	14 (3.8)	28 (7.5)
D4	-10	5/8"	7/8"-14	16.7 (.66)	22 (5.7)	44 (11.5)
D5	-12	3/4"	1-1/16"-12	19.0 (.75)	34 (9.1)	69 (18.2)
D6	-16	1"	1-5/16"-12	19.0 (.75)	66 (17.4)	132 (34.9)
D7	-20	1 1/4"	1-5/8"-12	19.0 (.75)	108 (28.5)	215 (56.9)
D8	-24	1 1/2"	1-7/8"-12	19.0 (.75)	160 (42.2)	319 (84.3)
D9	-32	2"	2-1/2"-12	19.0 (.75)	294 (77.7)	588 (155.3)

Porting Code S

FOUR BOLT SPLIT FLANGE TYP SAE J518 CODE 61

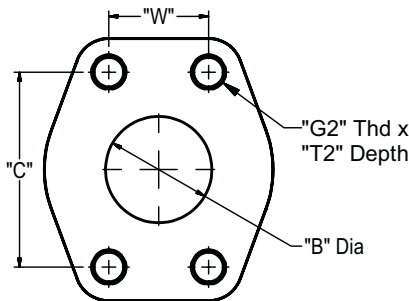

*Note: The pump inlet flow velocity should not exceed 3.0 m/s (10 fps). Pump outlet and motor inlet or outlet flow velocities should not exceed 6.1 m/s (20 fps).

Code	Dash Size	Nominal ID	"G2" Thd Size inch	"T2" Full Thd Min mm (inch)	"B" Dia mm (inch)	"C" mm (inch)	"W" mm (inch)	Recommended Max Flow* lpm (gpm)	
								Pump Inlet	Pump Outlet & Motor
S1	-8	1/2"	5/16"-18	15.0 (0.59)	12.7 (0.50)	38.10 (1.500)	17.48 (0.688)	23 (6.1)	46 (12.2)
S2	-12	3/4"	3/8"-16	14.0 (0.56)	19.0 (0.75)	47.63 (1.875)	22.23 (0.875)	52 (13.8)	104 (27.5)
S3	-16	1"	3/8"-16	20.6 (0.81)	25.4 (1.00)	52.37 (2.062)	26.19 (1.031)	93 (24.5)	185 (49.0)
S4	-20	1 1/4"	7/16"-14	20.6 (0.81)	31.8 (1.25)	58.72 (2.312)	30.17 (1.188)	145 (38.3)	290 (76.5)
S5	-24	1 1/2"	1/2"-13	27.0 (1.06)	38.1 (1.50)	69.85 (2.750)	35.71 (1.406)	208 (55.1)	417 (110.2)
S6	-32	2"	1/2"-13	27.0 (1.06)	50.8 (2.00)	77.77 (3.062)	42.88 (1.688)	370 (97.9)	742 (195.9)

PGP610 Typical Outlet Flow and Input Power 120°F (50°C), ISO VG32 Fluid											
Speed rpm	units	Displacement / Maximum Allowable Continuous Pressure									
	cc in³ bar psi	7	10	14	16	18	21	23	26	28	32
900	lpm	6.0	8.5	11.9	13.6	15.3	17.9	19.6	22.1	23.8	27.2
	gpm	1.6	2.2	3.1	3.6	4.0	4.7	5.2	5.8	6.3	7.2
	kw	3.1	4.4	6.2	7.1	7.4	7.8	7.8	7.8	7.7	9.0
	hp	4.2	5.9	8.3	9.5	9.9	10.4	10.4	10.4	10.3	12.1
1200	lpm	8.0	11.3	15.9	18.1	20.4	23.8	26.1	29.5	31.8	36.3
	gpm	2.1	3.0	4.2	4.8	5.4	6.3	6.9	7.8	8.4	9.6
	kw	4.1	5.9	8.3	9.5	9.9	10.4	10.4	10.3	10.2	12.0
	hp	5.6	7.9	11.1	12.7	13.2	13.9	13.9	13.9	13.7	16.1
1500	lpm	10.0	14.3	20.1	22.9	25.8	30.1	32.9	37.2	40.1	45.8
	gpm	2.6	3.8	5.3	6.1	6.8	7.9	8.7	9.8	10.6	12.1
	kw	5.2	7.5	10.5	12.0	12.5	13.1	13.1	13.1	12.9	15.2
	hp	7.0	10.0	14.0	16.0	16.7	17.6	17.6	17.5	17.3	20.4
1800	lpm	12.1	17.3	24.2	27.6	31.1	36.3	39.7	44.9	48.4	55.3
	gpm	3.2	4.6	6.4	7.3	8.2	9.6	10.5	11.9	12.8	14.6
	kw	6.3	9.0	12.6	14.3	15.0	15.8	15.8	15.7	15.5	18.3
	hp	8.4	12.0	16.8	19.2	20.1	21.1	21.1	21.0	20.8	24.5
2100	lpm	14.2	20.3	28.4	32.4	36.5	42.6	46.6	52.7	56.7	64.8
	gpm	3.7	5.4	7.5	8.6	9.6	11.2	12.3	13.9	15.0	17.1
	kw	7.4	10.6	14.8	16.9	17.7	18.6	18.6	18.5	18.3	21.5
	hp	9.9	14.2	19.9	22.7	23.7	24.9	24.9	24.8	24.6	28.9
2400	lpm	16.3	23.3	32.6	37.2	41.9	48.9	53.5	60.5	65.2	74.5
	gpm	4.3	6.1	8.6	9.8	11.1	12.9	14.1	16.0	17.2	19.7
	kw	8.6	12.2	17.1	19.6	20.4	21.5	21.5	21.4	21.2	24.9
	hp	11.5	16.4	22.9	26.2	27.4	28.8	28.8	28.7	28.42	33.4
2700	lpm	18.3	26.2	36.7	41.9	47.1	55.0	60.2	68.1	73.3	83.8
	gpm	4.8	6.9	9.7	11.1	12.5	14.5	15.9	18.0	19.4	22.1
	kw	9.7	13.9	19.5	22.2	23.2	24.4	24.4	24.3	24.1	28.3
	hp	13.1	18.6	26.1	29.8	31.1	32.7	32.7	32.6	32.3	38.0
3000	lpm	20.4	29.1	40.7	46.6	52.4	61.1	66.9	75.7	81.5	93.1
	gpm	5.4	7.7	10.8	12.3	13.8	16.1	17.7	20.0	21.5	24.6
	kw	10.9	15.6	21.9	25.0	26.1	27.4	27.4	27.3	27.0	31.8
	hp	14.7	21.0	29.3	33.5	35.0	36.8	36.8	36.6	36.3	42.7
3300	lpm	22.3	31.8	44.6	51.0	57.3	66.9	73.2	82.8	89.2	101.9
	gpm	5.9	8.4	11.8	13.5	15.1	17.7	19.3	21.9	23.6	26.9
	kw	12.2	17.4	24.3	27.8	29.0	30.5	30.5	30.4	30.1	35.4
	hp	16.3	23.3	32.6	37.3	38.9	40.9	40.9	40.8	40.4	47.5

PGP620 Typical Outlet Flow and Input Power 120°F (50°C), ISO VG32 Fluid										
Speed rpm	units	Displacement / Maximum Allowable Continuous Pressure								
	cc in ³ bar psi	19	23	26	29	33	37	41	44	50
900	lpm	16.2	19.6	22.1	24.7	28.1	31.5	34.9	37.4	42.5
	gpm	4.3	5.2	5.8	6.5	7.4	8.3	9.2	9.9	11.2
	kw	8.4	10.2	11.5	12.9	14.6	14.9	14.5	14.9	16.9
	hp	11.3	13.7	15.5	17.2	19.6	20.0	19.5	20.0	22.7
1200	lpm	21.7	26.1	29.5	32.9	37.4	42.0	46.5	49.9	56.7
	gpm	5.7	6.9	7.8	8.7	9.9	11.1	12.3	13.2	15.0
	kw	11.2	13.6	15.4	17.2	19.5	19.9	19.4	19.9	22.6
	hp	15.1	18.2	20.6	23.0	26.2	26.7	26.0	26.6	30.3
1500	lpm	27.2	32.9	37.2	41.5	47.3	53.0	58.7	63.0	71.6
	gpm	7.2	8.7	9.8	11.0	12.5	14.0	15.5	16.7	18.9
	kw	14.2	17.2	19.4	21.7	24.7	25.1	24.5	25.1	28.5
	hp	19.0	23.0	26.1	29.1	33.1	33.7	32.9	33.7	38.3
1800	lpm	32.8	39.7	44.9	50.1	57.0	63.9	70.8	76.0	86.4
	gpm	8.7	10.5	11.9	13.2	15.1	16.9	18.7	20.1	22.8
	kw	17.0	20.6	23.3	26.0	29.6	30.2	29.4	30.1	34.2
	hp	22.8	27.7	31.3	34.9	39.7	40.4	39.4	40.4	45.9
2100	lpm	38.5	46.6	52.7	58.8	66.9	75.0	83.1	89.2	101.3
	gpm	10.2	12.3	13.9	15.5	17.7	19.8	21.9	23.6	26.8
	kw	20.1	24.3	27.5	30.7	34.9	35.6	34.7	35.5	40.4
	hp	26.9	32.6	36.9	41.1	46.8	47.7	46.5	47.7	54.2
2400	lpm	44.2	53.5	60.5	67.5	76.8	86.1	95.4	102.4	116.4
	gpm	11.7	14.1	16.0	17.8	20.3	22.8	25.2	27.1	30.7
	kw	23.2	28.1	31.8	35.4	40.3	41.1	40.1	41.1	46.7
	hp	31.1	37.7	42.6	47.5	54.1	55.1	53.8	55.1	62.6
2700	lpm	49.8	60.2	68.1	76.0	86.4	96.9	107.4	115.2	131.0
	gpm	13.1	15.9	18.0	20.1	22.8	25.6	28.4	30.4	34.6
	kw	26.4	32.0	36.2	40.3	45.9	46.8	45.6	46.7	53.1
	hp	35.4	42.9	48.5	54.1	61.5	62.7	61.2	62.7	71.2
3000	lpm	55.3	66.9	75.7	84.4	96.0	107.7	119.3	128.0	145.5
	gpm	14.6	17.7	20.0	22.3	25.4	28.4	31.5	33.8	38.4
	kw	29.7	35.9	40.6	45.3	51.6	52.6	51.3	52.5	59.7
	hp	39.8	48.2	54.5	60.8	69.1	70.5	68.7	70.4	80.0

PGP640 Typical Outlet Flow and Input Power 120°F (50°C), ISO VG32 Fluid								
Speed rpm	units	Displacement / Maximum Allowable Continuous Pressure						
	cc in ³ bar psi	30	35	45	55	65	75	80
900	lpm	25.5	31.5	38.3	46.8	55.3	63.8	68.0
	gpm	6.7	8.3	10.1	12.4	14.6	16.9	18.0
	kw	13.3	16.4	20.0	24.4	27.8	27.2	27.1
	hp	17.8	22.0	26.8	32.7	37.3	36.5	36.3
1200	lpm	34.2	42.0	51.0	62.4	73.7	85.1	90.7
	gpm	9.0	11.1	13.5	16.5	19.5	22.5	24.0
	kw	17.7	21.9	26.6	32.5	37.0	36.3	36.1
	hp	23.8	29.3	35.7	43.6	49.7	48.7	48.4
1500	lpm	43.0	53.0	64.5	78.8	93.1	107.4	114.6
	gpm	11.4	14.0	17.0	20.8	24.6	28.4	30.3
	kw	22.4	27.6	33.6	41.1	46.8	45.9	45.7
	hp	30.1	37.1	45.1	55.1	62.8	61.5	61.2
1800	lpm	51.8	63.9	77.8	95.0	112.3	129.6	138.2
	gpm	13.7	16.9	20.5	25.1	29.7	34.2	36.5
	kw	26.9	33.2	40.4	49.3	56.2	55.0	54.8
	hp	36.1	44.5	54.1	66.1	75.3	73.8	73.5
2100	lpm	60.8	75.0	91.2	111.5	131.7	152.0	162.1
	gpm	16.1	19.8	24.1	29.4	34.8	40.2	42.8
	kw	31.7	39.1	47.6	58.2	66.3	64.9	64.6
	hp	42.6	52.5	63.8	78.0	88.8	87.0	86.7
2400	lpm	69.8	86.1	104.8	128.0	151.3	174.6	186.2
	gpm	18.4	22.8	27.7	33.8	40.0	46.1	49.2
	kw	36.7	45.2	55.0	67.2	76.6	75.0	74.7
	hp	49.2	60.6	73.8	90.1	102.7	100.6	100.1
2700	lpm	78.6	96.9	117.9	144.0	170.2	196.4	209.5
	gpm	20.8	25.6	31.1	38.1	45.0	51.9	55.3
	kw	41.7	51.4	62.6	76.5	87.1	85.3	84.9
	hp	55.9	69.0	83.9	102.6	116.8	114.4	113.9
3000	lpm	87.3	107.7	131.0	160.1	189.2	218.3	232.8
	gpm	23.1	28.4	34.6	42.3	50.0	57.7	61.5
	kw	46.9	57.8	70.3	85.9	97.9	95.9	95.5
	hp	62.9	77.5	94.3	115.2	131.2	128.6	128.0